



QUARTORIGO


fantasia 1.4

SPECIFICATIONS


| | |
|---------------------|--------------|
| POWER SUPPLY | 9-15VCC |
| STANDBY CURRENT | 1.2A |
| INPUT SENSIVITY | 0.4-8V |
| INPUT IMPEDANCE | 48KΩ |
| OUTPUT STEREO HD 4Ω | 40W/2 |
| OUTPUT STEREO 4Ω | 80W/2 |
| OUTPUT MONO HD 4Ω | 230W/1 |
| OUTPUT MONO 4Ω | 360W/1 |
| FREQUENCY RESPONSE | 7HZ-70.000HZ |
| SIGNAL/NOISE RATIO | >100DB |
| FUSES | 230A |
| DIMENSIONS (W*H*D) | 434*40*187MM |
| WEIGHT | 4.5KG |

FUSES ARE LOCATED ON RIGHT SIDE OF THE AMPLIFIER.
SIDE PLATE NEEDS TO BE REMOVED.

STEREO HD / STEREO CONNECTION

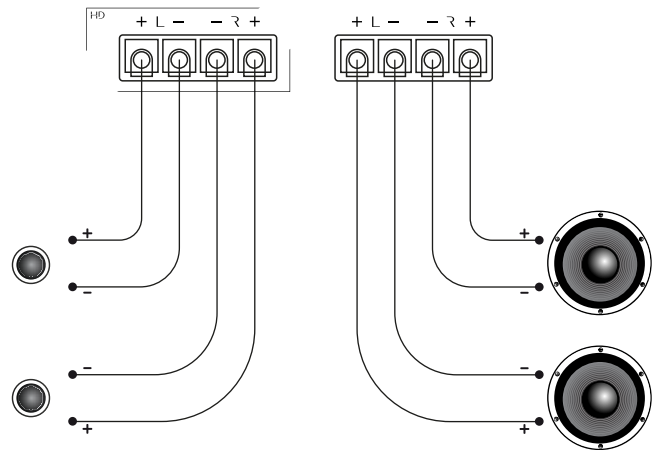

MONO CONNECTION

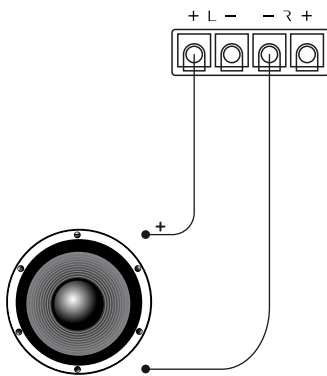

MONO

- STEREO CONFIGURATION
- ONLY LEFT INPUT IS ACTIVE

STEREO + MONO CONNECTION

